

- Please read this manual carefully before operation
- Applicable objects: This kit is suitable for electric guitar, acoustic guitar, ukulele and bass

• Effect: This kit can effectively remove the rust stain on the surface of the frets, improve the gloss of the frets and reduce the friction between the strings and the frets, thereby reducing the string noise during the performance, improving feel and performance

- It only takes you 30 minutes if you follow this tutorial
- It is recommended to operate it on a table with a soft cloth
- This kit is designed for three times of polishing



2

3

4

String Fixer

Fix strings for easy polishing







• After loosening the strings, separate the strings on both sides with the string fixer in the middle of the neck


• Fold the ends of the string fixer to the back of the neck and bond them together

• Done

Anti-collision Foam

Prevent paint scratch caused by surface friction






• Lift up from the end with an arrow. Acoustic guitar, electric guitar, bass paste three. Ukulele paste two

• Please attach it to the back of the body as shown to prevent damage to the body during polishing





Fix and protect the head

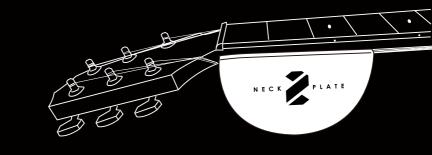

Place the neck plate on a horizontal table, then put the neck in the fixing slot and fix it with a small force

• If the head touches the table, please properly raise the neck plate

Stickers

Prevent the polishing paste from contacting fingerboard and therefore protect fingerboard



Electric guitar, acoustic guitar, bass use large and medium stickers
Ukulele uses medium and small stickers
Paste the patterned sticker first and next the patternless sticker. Then fold the wings to the back of the neck.

To prevent the polishing paste from entering the slit of the frets, please align the edge of the patch with the edge of the frets when bonding



6

Gloves Avoid direct skin contact with polishing paste and improve polishing efficiency



Wipe Cloth

Polish and clean the residue after polishing






Each wipe cloth is divided into eight sectors. Polish with one sector, and then wipe the polished residue with the adjacent sector Hold the polishing cloth as shown and press your forefinger fingertips on the surface of sector

• For the best polishing performance, 6 pieces of wipe cloth are recommended each time

Polishing Paste

Remove rust and oxide layer on the surface of the frets



• Extrude paste about 0.5mm onto the wipe cloth

THEFT

1 2

t I C

STIC KERS

C 🗶 K E R S

• In general, 10 times of rubbing back and forth recover the gloss of frets, and 50 times can finish up specular effect


- Please cover the lid after use. Do not let the polishing paste air-dry during polishing The surface of the frets should be dry and free of loose dirt when polishing Please operate in a ventilated environment. Do not contact the skin for a long time. Wash hands with soap after operation Please do not eat. Inadvertently contacted with eyes, rinse your eyes with water or saline and seek medical attention merceliated. This product does not a contact or grant according to the second se immediately. This product does not contain carcinogens



8

Protective Oil

Clean polishing residue, clean and moisturize fingerboard, then enhance your feel and performance

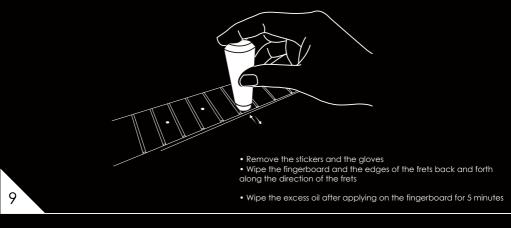



- It is recommended to maintain your guitar every 4 months
- Please keep this product in a dry place at room temperature
- If facing problems during operation, you can consult local retailer or dealer
- Additional Information
 You can find more help and information from our official website: www.dolphil.com
- Patent Notic

DOLPHIL guitar fret polisher and methods used in association with this kit may be covered by one or more patents or pending patent applications

- Version: 2018IN1
- Copyright © DOLPHIL. All rights reserved